

TECHNICAL SPECIFICATION

Facade lighting - OL9613-W LED



Technical data

- Rated voltage: 230V / 50-60Hz
- Power of the light source: 6W
- Lumens /whole fixture/: 360lm
- LED type: SMD
- Light source: Epistar Taiwan
- Colour temperature: 4000-4300K
- Colour rendering index: Ra≥80
- Protection against dust and moisture : IP54
- LED driver: mounted in the body
- Switch on/off > 15 000
- Average Lifetime: 30 000h
- Operating temperature: -20° ÷ + 65°C
- Case: polycarbonate (PC)
- Diffuser: polycarbonate (PC)
- Body colour: dark grey
- Dimensions: 60x43x210mm
- Installation: surface mounting on a wall
- Surface requirements: Class F

Areas of application

- Suitable for outdoor use
- Additional, aesthetic, directional, architectural lighting for buildings' facades, fences' columns and other outdoor sites

Product benefits


- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration-free body
- Low heat emission

Variants and dimensions



Watt	LED chip lumens (lm)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
					L	W	H		
6W	510	360	4000-4300	dark grey	60	43	210	9613LEDW	16

Energy efficiency

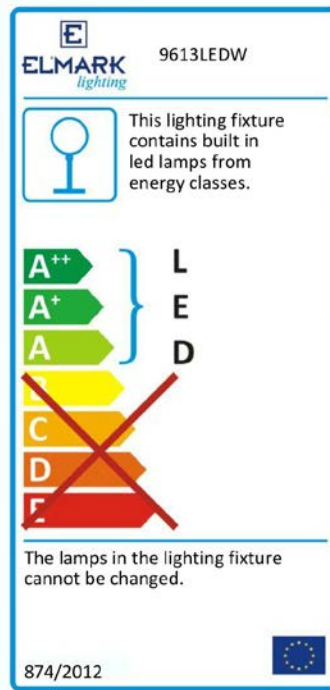

Barcodes

Barcode	Catalogue number
3800131186447	9613LEDW

Standards

EN 55015

EN 61000-3-2; EN 61000-3-3

EN 61547

EN 60598-1; EN 60598-2-2

