

TECHNICAL SPECIFICATION

Wall mounted fixtures BRLED ROUND



Technical data

- Lamp power: 6W/ 12W
- Rated voltage: 230V / 50/60Hz
- Colour temperature: 4000K
- Lumens /whole fixture/:
 - 6W - 480lm
 - 12W - 960lm
- Power Supply: control gear, DC device – driver, included in the set
- LED type: SMD
- Light source: EPISTAR
- Colour rendering index: Ra≥80
- Average Lifetime: 30 000h
- Housing: polycarbonate
- Colour of the housing: white, black
- Installation: surface mounting

- Protection against dust and moisture: IP54

Areas of application

- Kitchen premises
- Service areas
- Damp areas
- Dusty environment
- Roofed outdoor areas

Product benefits


- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Safety, low voltage operation
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays

Variants and dimensions

Watt	LED chip lumens (lm)	Whole fixture lumens (lm)	Colour temp (K)	Colour body	Size (mm)		Catalogue number	Packing (pcs)
					Diameter	Height		
6W	720	480	4000	white	170	100	95BRLED6WH	24
6W	720	480	4000	black	170	100	95BRLED6BL	24

12W	1440	960	4000	white	220	100	95BRLED12WH	24
12W	1440	960	4000	black	220	100	95BRLED12BL	24

Energy efficiency

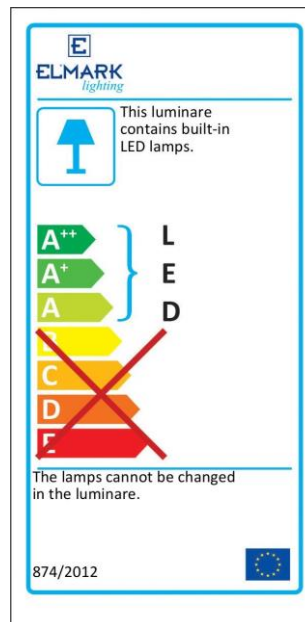

Barcodes

Barcode	Catalogue number
3800131192769	95BRLED6WH
3800131192783	95BRLED6BL
3800131192776	95BRLED12WH
3800131192790	95BRLED12BL

Standards

EN 55015 EN 61000-3-2; EN
61000-3-3 EN 61547 EN
60598-1; EN 60598-2-2

