

TECHNICAL SPECIFICATION

LED Floodlight LINEAR RGB



Technical data

- Power: 18W/36W
- Whole lamp lumens: RGB
- Colour temperature: 4000k
- Rated voltage: LinearRGB DC24V
- LED type: SMD
- Light source: SMD2835
- Protection against dust and moisture: IP65
- Housing: aluminum body
- Colour of the housing: silver
- Rubber cable: 300mm
- Ambient temperature: -30°C +65°C
- Long life: 30000 hours
- Colour rendering index: Ra>70

Areas of application

- Sports halls
- Commercial areas
- Warehouses
- Production facilities
- Squares, fleets
- Parking lots


Product benefits

- Provides different combinations of coloured light
- Wide distribution of even and stable light
- Economic - low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body
- Voltage supply fluctuations do not affect the normal operation of the floodlights

Variants and dimensions

Catalogue number	Model	Watt	Whole lamp lumens (lm)	Colour temp. (K)	Size (mm)		
					Length	Width	Height
98LINEAR18RGB	LINEAR18RGB	18W	RGB	4000	1000	25	33
98LINEAR36RGB	LINEAR36RGB	36W	RGB	4000	1000	65	62

Energy efficiency

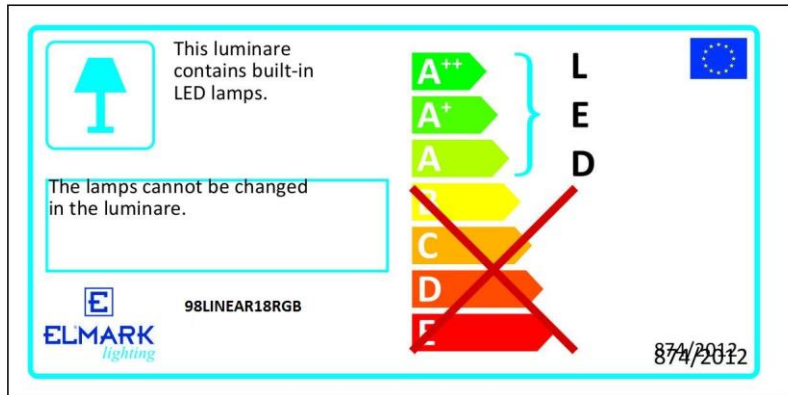

Barcodes

Barcodes	Catalogue number
3800131202369	98LINEAR18RGB
3800131202376	98LINEAR36RGB

Standards

EN 55015

EN 61000-3-2

EN 61000-3-3

EN 61547

EN 60598-1; EN 60598-2-5

