

## TECHNICAL SPECIFICATION

### LED FLOODLIGHT LYRA RGB WITH INFRARED REMOTE CONTROL



#### Technical data

- Power: 10W/20W/30W/50W
- Rated voltage: ~200V-240V
- Power supply: low-voltage, direct-current device
- LED type: COB
- Color temperature: RGB
- Protection against dust and moisture: IP65
- Housing: aluminum body
- Colour body: Black
- Reflector: mirror aluminium
- Diffuser: heat-resistant glass
- Long life: 20000 hours

## Areas of application

- Architectural lighting
- Aesthetic building appearance
- Retail environments


## Product benefits

- Efficient replacement of traditional halogen and metal-halide floodlights
- Wide distribution of elegant and even light
- Economic- low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body
- Voltage supply fluctuations do not affect the normal operation of the floodlights

## Variants and dimensions

Model	Watt	Colour temp.	Colour body	Size			Catalogue number
				Length	Width	Height	
LYRA10	10	RGB	black	113	145	41	98LYRA10RGB
LYRA20	20	RGB	black	140	195	50	98LYRA20RGB
LYRA30	30	RGB	black	184	254	57	98LYRA30RGB
LYRA50	50	RGB	black	233	300	67	98LYRA50RGB

## Energy efficiency

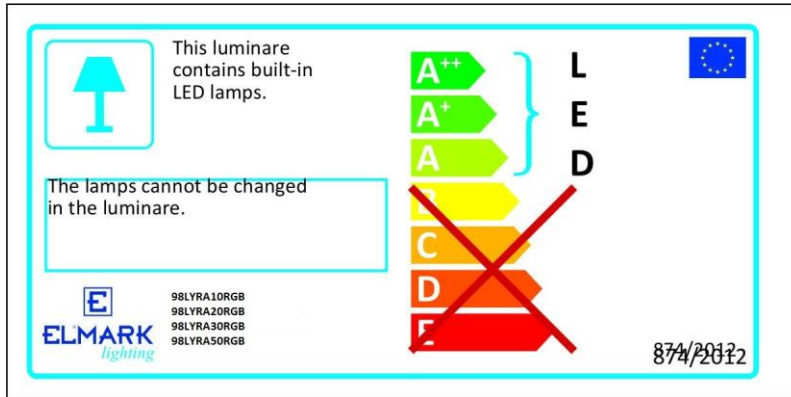

## Standards

EN 60598-1

EN 60598-2-5

EN 55015

EN 61000-3-2

EN 61000-3-3

EN 50581:2012

EN 62471:2008

