

TECHNICAL SPECIFICATION

OUTDOOR AREA LIGHTING WORKLAMP



Technical data

- Power: 10W
- Nominal voltage: 100-240VAC
- Power supply: low-voltage, direct-current device – Waterproof driver
- Rechargeable battery
- With adaptor and car charger – 12V
- Time of battery work: 100% light – 2h; 50% - 4h
- LED Driver: mounted in the body
- LED type: SMD
- Light source: SMD2835
- Luminous flux: 600lm
- Color temperature: 4000
- Beam angle: 110°
- Colour rendering index: Ra≥80
- Protection against dust and moisture : IP44
- Housing: Aluminium
- Colour of the housing: FLOODY10Y – Yellow; FLOODY10G - Green

- Long life: 20000 hours
- All-round rotation 360°
- Any angle hover
- Ambient temperature: -30°C ÷ +65°C

Areas of application

- Warehouses
- Production facilities
- Put in bag – outdoor partner
- Car services
- Outdoor campings


Product benefits

- Compact for put in bag
- Suitable for instant need of light, when its necessary
- Rechargeable battery
- Wide distribution of even and stable light
- Economic- low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body
- Voltage supply fluctuations do not affect the normal operation of the floodlights

Dimensions

Model	Watt	Whole fixture lumens (lm)	Colour temp. (k)	Colour body	Size			Catalogue number	Packing (pcs)
					Length	Width	Height		
FLOOD10Y	10	600	4000	YELLOW	242	25	215	98FLOOD10Y	1
FLOOD10G	10	600	4000	GREEN	242	25	215	98FLOOD10G	1

Energy efficiency

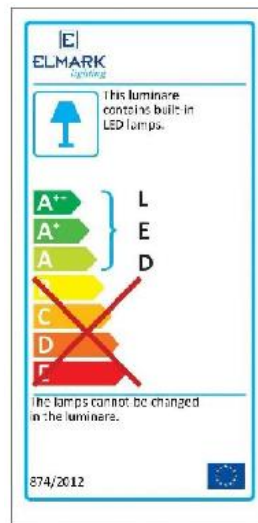

Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547
EN 60598-1, EN 60598-2-3

