

## TECHNICAL SPECIFICATION

### LED Cabinet Light – CAB-19



#### Technical data

- Power: 2.8W
- Color temperature: white / warm white
- Rated voltage: 12VDC
- Power Supply: control gear – driver for 12VDC (not included in the set)
- Built - in door sensor
- Type of LED: SMD5050
- Light source: Epistar Taiwan
- Luminous flux: 185lm
- Protection against dust and moisture: IP20
- Housing: aluminum 160x50x9mm
- Colour of the housing: grey
- Diffuser: PMMA
- Long life : 30000h
- Beam angle: 120°
- Colour rendering index: Ra≥80


#### Areas of application

- Kitchen facilities
- Service areas
- Residential buildings

## Product benefits


- Safety, low voltage operation
- Uniform and gentle illumination
- Low power consumption
- Repeated switch on/off does not affect life span
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays

## Variants and dimensions

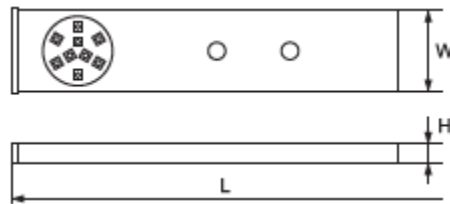

Watt	Lumen (lm)	Colour temp.	Colour body	Size			Catalogue number	Packing (pcs)
				Length	Width	Height		
2.8W	185	white	grey	160	50	9	919LED010	10
2.8W	185	warm white	grey	160	50	9	919LED110	10

## Energy efficiency

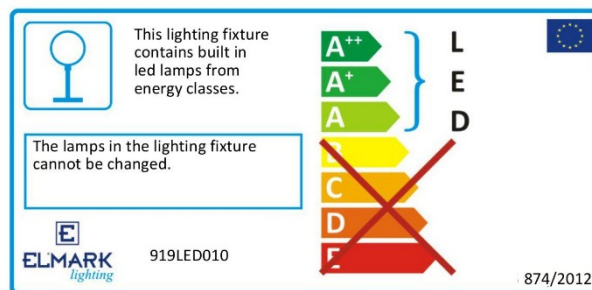

## Barcodes

Barcode	Catalogue number
3800131185747	919LED010
3800131185754	919LED110

## Standards

EN 60598-1

EN 60598-2-4

EN 60598-2-22

