

TECHNICAL SPECIFICATION

LED Cabinet Light – CAB-11



Technical data

- Power: 3.5W
- Color temperature: white / warm white
- Rated voltage: 12VDC
- Power Supply : Low Voltage , DC device
- Built - in motion sensor
- Type of LED: SMD5050
- Light source: Epistar Taiwan
- Luminous flux: 270lm
- Protection against dust and moisture: IP20
- Housing: aluminum body 450x23x7mm
- Diffuser: diffused cover
- Long life : 30000h
- Beam angle: 120°
- Colour rendering index: Ra≥80


Areas of application

- Kitchen facilities
- Service areas
- Residential buildings
- Retail Showcases and counters

Product benefits


- Safety, low voltage operation
- Uniform and gentle illumination
- Low power consumption
- Repeated switch on/off does not affect life span
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays

Variants and dimensions

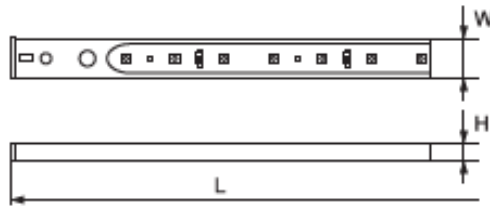

Watt	Lumen (lm)	Colour temp.	Colour body	Size			Catalogue number	Packing (pcs)
				Length	Width	Height		
3.5W	270	white	grey	450	23	7	911LED04	10
3.5W	270	warm white	grey	450	23	7	911LED14	10

Energy efficiency

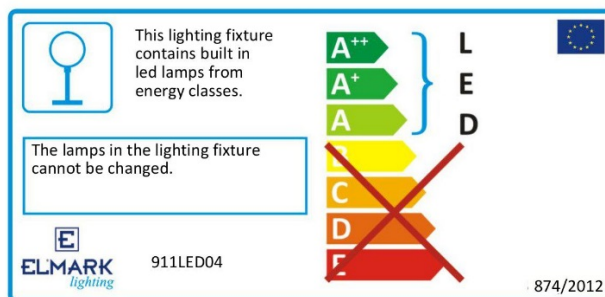

Barcodes

Barcode	Catalogue number
3800131179524	911LED04
3800131179883	911LED14

Standards

EN 60598-1

EN 60598-2-1

EN 55015

EN 61547

EN 61000-3-2

