

## TECHNICAL SPECIFICATION

### LED Emergency XL88



#### Technical data

- Power : 3W
- Rated voltage: : 230V/50Hz
- Light source : LEDs diam. 5
- Protection against dust and moisture : IP21
- Battery : 2x4V/900mAh Ni-Cd
- Operating time: up to 3 hours
- Full charging time: up to 24 hours
- Body: aluminum frame
- Diffuser : glass with printed green signs


#### Areas of application

- Public buildings
- Commercial buildings
- Administrative buildings
- Residential buildings
- Banks
- Hospitals
- Schools

#### Product benefits

- Clearly indicates directions to emergency exits in panic situations
- Automatic switch-on in case of power failure
- Low power consumption


## Variants and dimensions

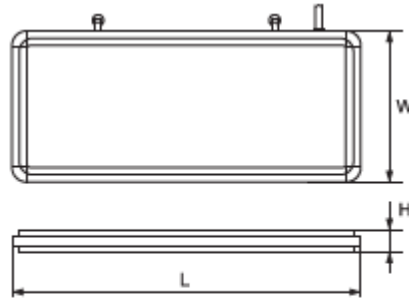

XL88

Model	LED chip lumens (lm)	Whole fixture lumens (lm)	Watt	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
						L	W	H		
XL88 LED DOUBLE FACE	6	35	3W	6200-6500	white	360	150	25	9XL88LED	10
XL88A LED ONE FACE ONLY	6	35	3W	6200-6500	white	360	150	25	9XL88ALED	10

## Energy efficiency

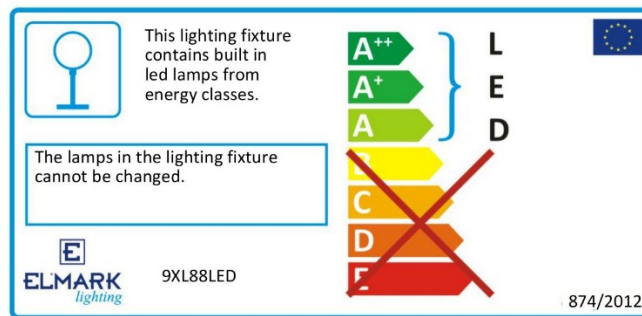

## Barcodes

Barcode	Catalogue number
3800131168337	9XL88LED
3800131168344	9XL88A LED

## Standards

EN 60598-1

EN 60598-2-4

EN 60598-2-22

